


RESIDENTIAL ALLEY DRIVEWAY APPROACH

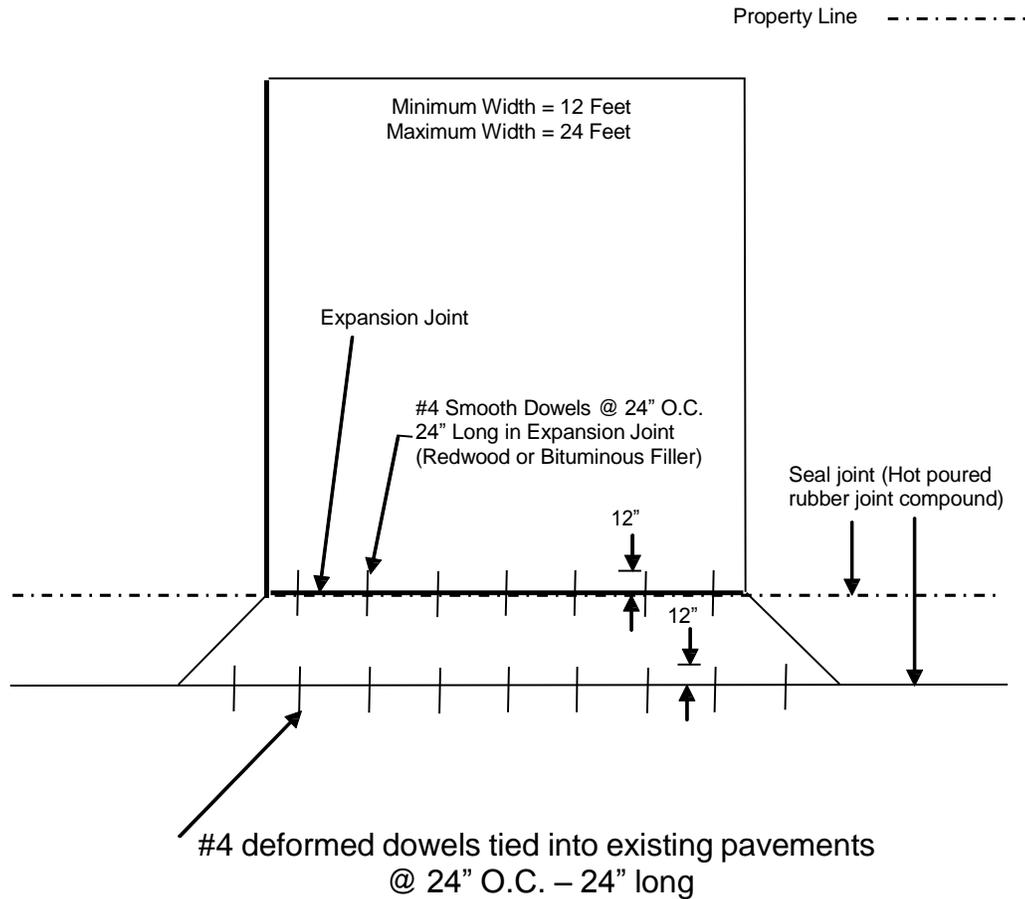

- Approach to be min. 6" thick, 3000 PSI Concrete with #3 Steel (3/8") at 24" O.C. each way on chairs
- If over excavated, backfill only with approved sand or gravel. Approach cannot rest on loose dirt; the subgrade under the new pavement shall be compacted to 95% compaction
- All smooth dowels must be lubricated
- Alley Approach – Drill into alley 12" deep at 24" O.C. and install 24" long #4 deformed dowels. Install expansion joint at property line
- The 5'0" radius is not applicable to alley approaches
- Water Meters are not allowed in Driveway