


## RESIDENTIAL ALLEY DRIVEWAY APPROACH

Property Line - - - - -

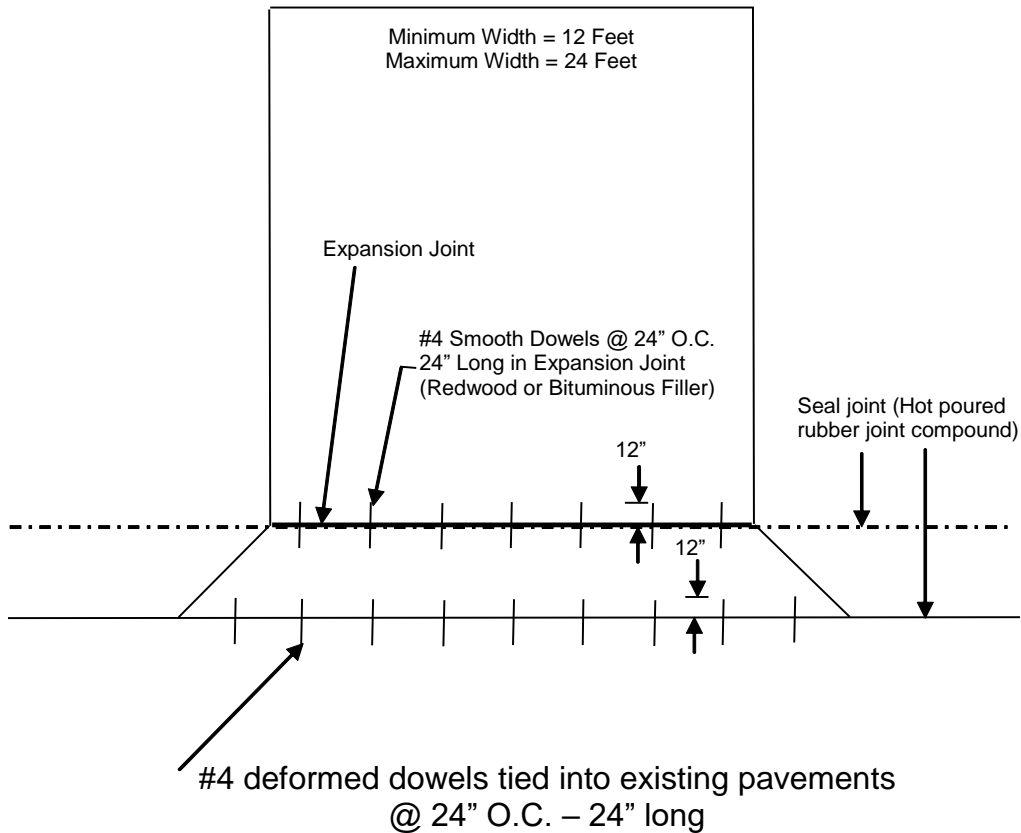

- Approach to be min. 6" thick, 3000 PSI Concrete with #3 Steel (3/8") at 24" O.C. each way on chairs
- If over excavated, backfill only with approved sand or gravel. Approach cannot rest on loose dirt; the subgrade under the new pavement shall be compacted to 95% compaction
- All smooth dowels must be lubricated
- Alley Approach – Drill into alley 12" deep at 24" O.C. and install 24" long #4 deformed dowels. Install expansion joint at property line
- The 5'0" radius is not applicable to alley approaches
- Water Meters are not allowed in Driveway

This handout is for informational purposes only and should not be relied on in place of official regulations and/or policies. The CITY OF PLANO makes no representations, guarantees, or warranties as to the accuracy, completeness, currency, or suitability of the information provided via the handout. Customers and citizens are personally responsible for complying with all local, state and federal laws pertaining to projects within the city. Copies of the CITY OF PLANO adopted codes and Zoning Ordinances can be found on the city website at [www.plano.gov](http://www.plano.gov) or at the CITY OF PLANO Municipal Center at 1520 Avenue K, Plano, Texas.